

STRETCH BAND-IT™ may just make tape, strapping, and string obsolete!

Why Change?

Stretch Band-it™ is a revolutionary new package wrapping system that eliminates the use of tape, string, strapping, banding and twine.

Stronger, Lasts Longer

A radically new, patent pending, film stretch system gives you the right amount of film stretch for any particular job. Most important, the stretch wrap only sticks to itself — and won't damage packages or deface goods like other conventional methods.

What's A NEWTON?

A Newton is equivalent to .113 inch/pounds of torque, (providing the most precise measurement of film stretch). Beginning at 50 Newtons and increasing in increments of 100 the Stretch Band-Its are available in fixed Newton



models and adjustable models. The Adjustable Stretch Band-Its provide a range of 50 to 3000 Newtons, and offer flexibility in film stretch levels.

Your Distributor will help you with the correct size model for your particular application.


Maintenance-Free

There are no spare parts needed; no parts to replace or wear out! Stretch Band-It's stretch settings will endure through the toughest jobs.


Lightweight and easy-to-use for professional results.

Use Anywhere To Replace Tape, String, Strapping, And Twine

You'll enjoy the many uses you will find for this amazing product!

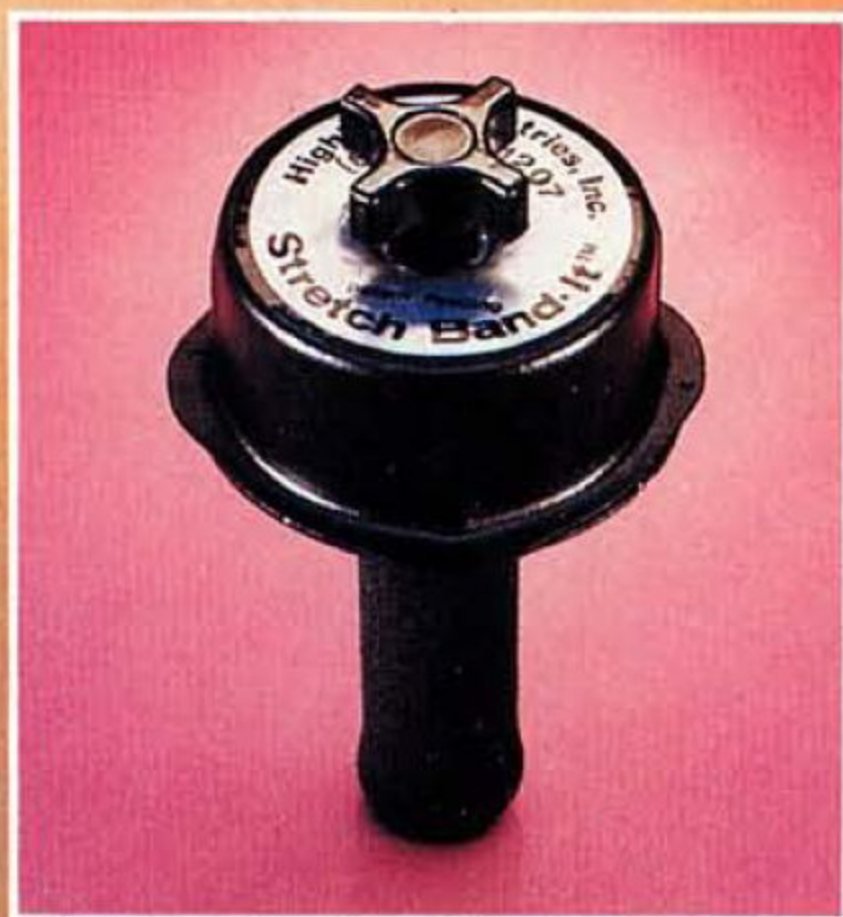

ADJUSTABLE STRETCH BAND-IT
An adjustable range of 50 to 3000 Newtons offers flexible film stretch levels.

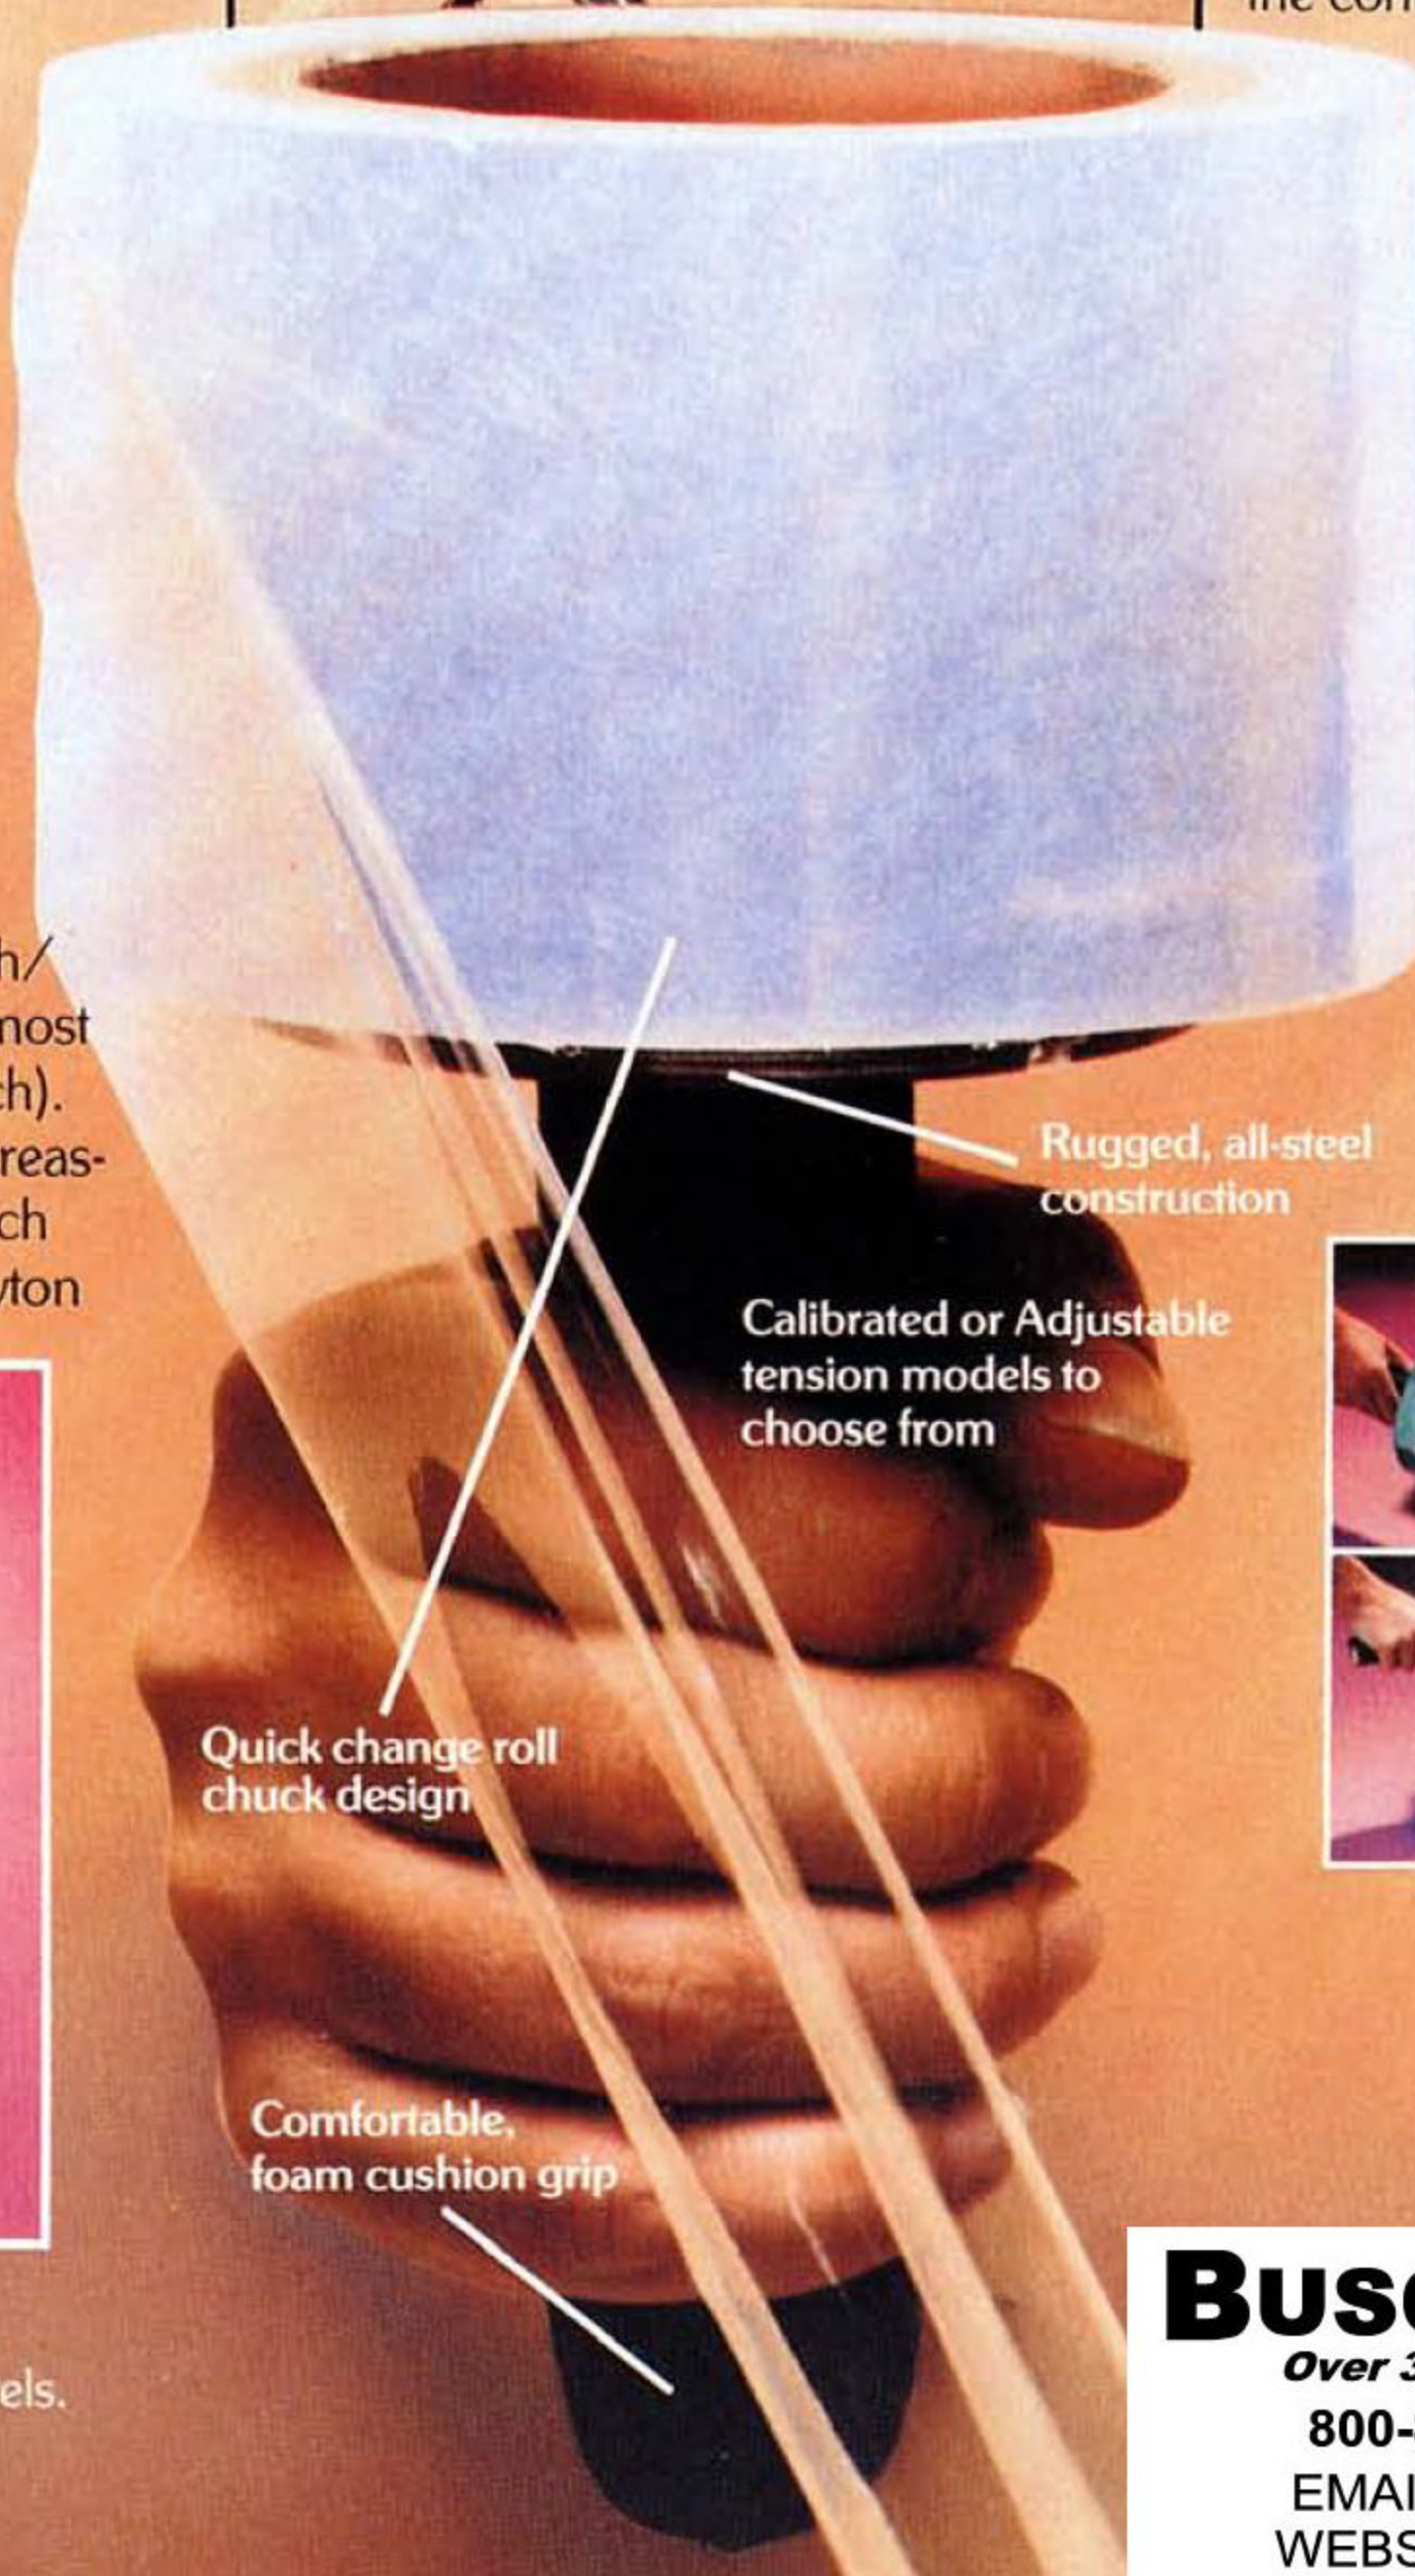

Rugged, all-steel construction

Calibrated or Adjustable tension models to choose from

Quick change roll chuck design

Comfortable, foam cushion grip



BUSCH MACHINERY


Over 30 Years of Applications Expertise

800-840-9573 INTL 520-777-3360


EMAIL: sales@busch-machinery.com

WEBSITE: <http://busch-machinery.com>

Operating Your Highlight Stretch Band-it

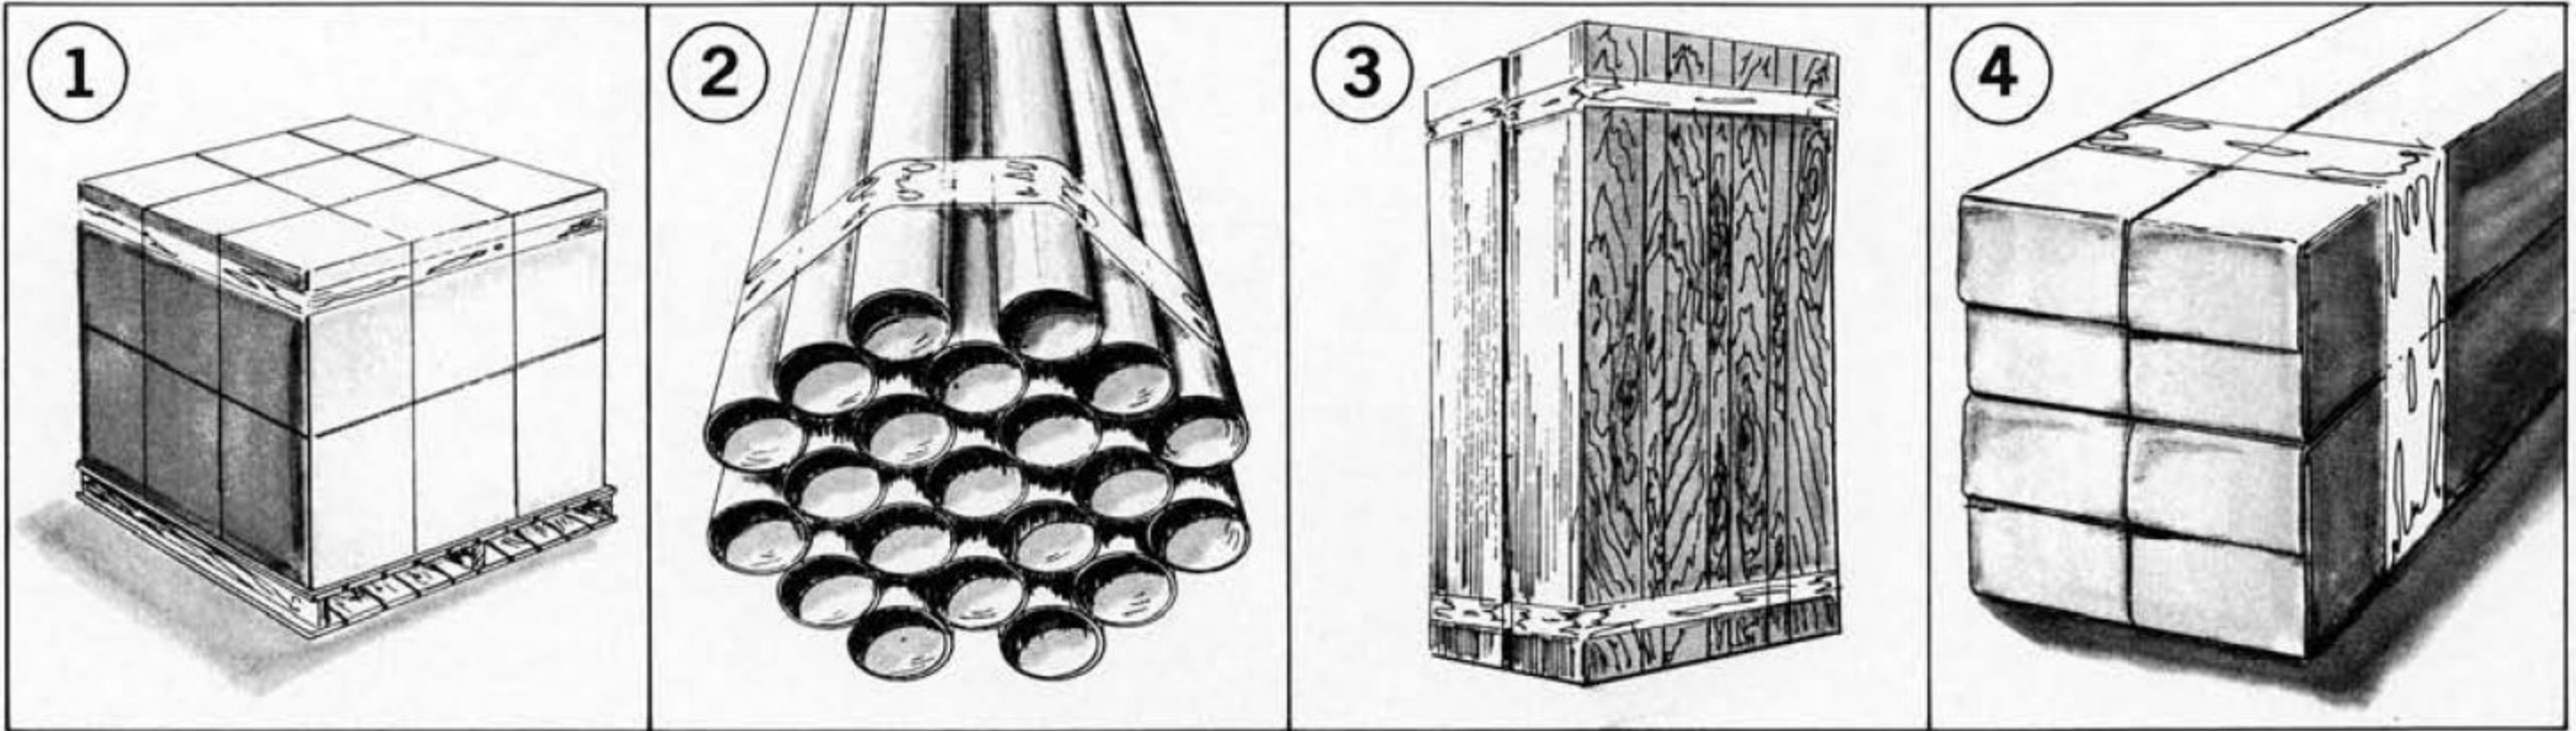

Loading the Film

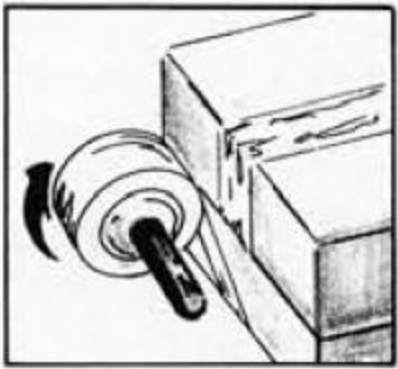

You must first determine the direction you will be stretch wrapping your product prior to loading the film. If you will be wrapping in a clockwise direction the film must feed off the roll in a clockwise direction. Likewise, if you are stretch wrapping in a counter-clockwise direction your film must feed off the roll in a counter-clockwise direction.



Place the film onto a smooth surface, as to not damage the film edges, and simply press fit your Band-It all the way into the film core, until the film core meets the Stretch Band-It's flanged lip.



Precalibrated Band-It models need no further adjustment to their respective stretch levels. Film stretch on the adjustable models can be controlled by turning the knob clockwise to increase tension, counter clockwise to decrease. When the desired level of film stretch is reached, the control assembly will remain in that position, delivering accurate, consistent wrapping.

Wrapping Methods

- ① Top banding of pallet
- ② Cylindrical product,
- ③ Panels,
- ④ Boxes

A partial list of STRETCH BAND-IT commercial applications

Pallet Wrapping
Poly Styrene (EPS)
Curtain Cleaners
Venetian Blinds (Levelor)
Bundles of Pipe

Wood Moldings
Magazines/ Periodicals
Wire, spools of ribbon, and cloth
Department Stores
Automobile Parts
Houses

Freight Companies
Mailing/Catalog Companies
Printed Boxes
KD corrugated boxes
Pharmaceutical Wholesalers
Nurseries

Moving Companies
Hose and Tubing
Hardwood flooring/ Paneling
Laundries
Building Material Centers

CONTACT:

BUSCH MACHINERY

Over 30 Years of Applications Expertise

800-840-9573 INTL 520-777-3360

EMAIL: sales@busch-machinery.com

WEBSITE: <http://busch-machinery.com>